

LED Power Supply CV Version



Features


- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- No load power consumption <0.6W
- Efficiency ≥85% (AC120V, full load)

Standards

UL8750
UL1310
FCC15



Dimensions: (inches/mm)

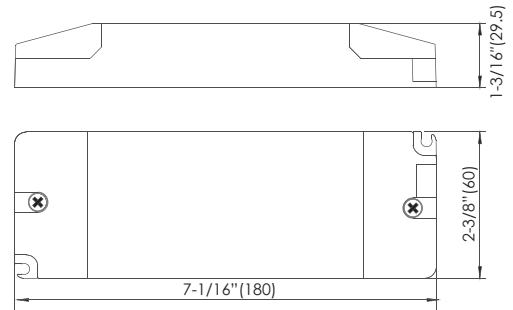


Characteristics

Rated input voltage: AC100-120V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	t_a	L x W x H	Approval
SLT75-24VL-2A	DC24V	0-75W	0.95	-4-95°F (-20-35°C)	7-1/16"x2-3/8"x1-3/16" (180x60x30mm)	

Listed driver configuration

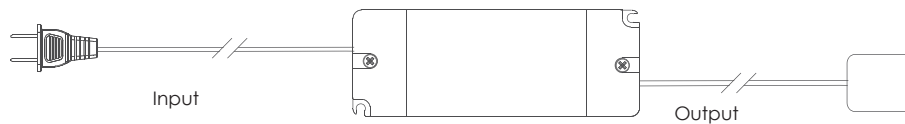

Input Plug	Input Cable Length	Model No.	Splitter	Output Cable Length
NA1 - NA1	59 - 59"	7524LA - SLT75-24VL-2A	4A - JB-4A 12A - JB-12A 6V - JB-6-4	6 - 6"

Example: NA159-7524LA-12A6