

Super Bright 24v Micro-Mini ORION 3250 Series

Specifications:

Description: The Super Bright 24v Micro-Mini ORION series offers high efficiency, low voltage luminaires designed to produce a 120° light beams in cold, frozen and dry environments. This series has endcaps with a 0.63" width and 0.50" height.

Features:

Lighting: Solid state lighting (SSL) LEDs; surface mounted diode (SMD) populated onto our two layer 2oz copper printed circuit board (PCB).

Tube and Endcaps: Polycarbonate LEXAN 244R

LEDs: 50mA each

LED Driver Input: 100VAC to 277VAC. Use only UL Listed Class 2 driver

LED Driver Output: 24VDC

Light Beam: 120° viewing angle

Life: L70 > 50,000 hrs

Temperature Ratings:

PCB (LEDs, etc): Ambient: -25°C~45°C; Case: -25°C~70°C


UL 2108 testing: 25°C

Warranty: 5 year limited warranty from manufacturing defects

Safety Certifications: UL/cUL Listed & NSF approved

Certifications: LEDingEDGE Lighting's Quality Management System is ISO 9001:2015 certified

Ingress Protection (IP): Design has been UL Ingress Protection tested and passed the IP68 standard

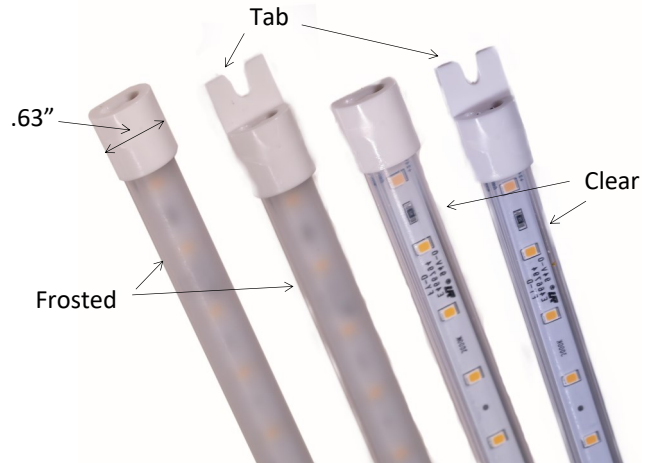

Options:

Color: Standard CCTs choices are 3000K, 3500K, 4000K, and 5000K with a CRI >90

Lens: Clear or frosted

Endcap: With or without tab

Lengths (rounded to the nearest inch):

Length	# of LEDs	Watts	Length	# of LEDs	Watts
7"	8	1.25	56"	80	12.50
12"	16	2.50	62"	88	13.75
18"	24	3.75	67"	96	15.00
23"	32	5.00	73"	104	16.25
29"	40	6.25	78"	112	17.50
34"	48	7.50	84"	120	18.75
40"	56	8.75	89"	128	20.00
45"	64	10.00	95"	136	21.25
51"	72	11.25			

"Off the Shelf" lengths available at 12", 23", 34" and 45"

UL Photometric Test Report Data:

CCT (K) Nom.	Length (in)	Lens	CRI	CCT (K) Actual	Lumens (lm)	Power (W)	Efficacy (lm/W)
3500	45	Clear	93	3494	1310	9.887	132.5

Above is the data from several of the many UL tests we have had conducted. Our custom-built lights have 2,176 variations that effect performance data so please contact us if you require more specific data for your unique needs.

Accessories:

Jumpers: Lengths from 3" to 96"; Straight, stripped, right-angle ends; black / white color options

Brackets: Metal, clear Acrylic, Rotating, Magnet

How to create part numbers:

Series	Type	Voltage	Length Options	Color Options (CCT)	Lens Options	Endcap Option
Super Bright, 24v Micro--Mini ORION 3250	Tube	24 volt	12" 23" 34" 45" Etc.	3000K 3500K 4000K 5000K	Clear-C Frosted-F	With tab-- add T
MIC3250	T	24V	45	35K	F	T

Example part number: MIC3250-T-24V-45-35K-F-T

