

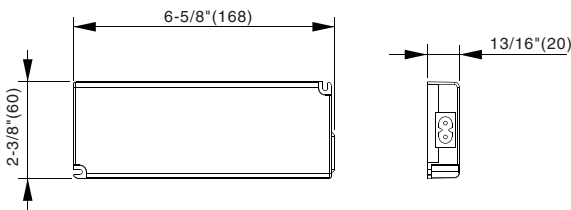
Features

- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- Soft on Technology
- No load power consumption <0.5W
- Efficiency≥91% (AC120V, full load)
- Up to 8 drivers maximum interconnected


Standards

- UL8750
- UL1310
- FCC15

Dimensions



Power Cable/Splitter Variations

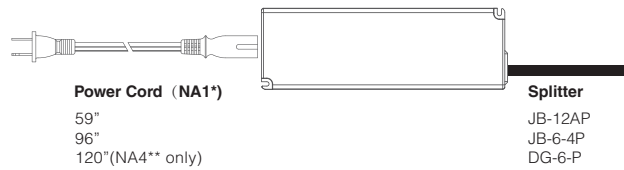

*NA1 (2-prong standard)
**NA4 (2-prong flat)

Characteristics

Rated input voltage: AC100-120V 50/60Hz(power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	ta
SLT40-24VL-UN-A1-K	DC24V	0-40W	0.95	-4-95°F (-20-35°C)




Listed driver configuration

Example: NA159-4024LDC-12A6

Input Plug	Input Cable Length	Model No.	Function	Splitter	Output Cable Length
NA1-NA1	59-59"	4024LDC-SLT40-24VL-UN-A1-K	SO-Soft On	[blank]-None	6-6"
NA1-NA1	96-96"			12A6-JB-12A	
NA4-NA4	120-120"			6V6-JB-6-4 DG6-DEGSON connector	

Splitter Options(MUST CHOOSE)

SPLITTER PACKED AND/OR SHIPPED SEPERATELY

Catalog No.	Description	Wire length (inch)
JB-12AP 12-way splitter with 6" cable for Daisy chain driver		6"
JB-6-4P 6-way splitter with 6" cable for Daisy chain driver		6"
DG-6-P Degson connector with 6" cable for Daisy chain driver		6"

Wiring Diagram

