

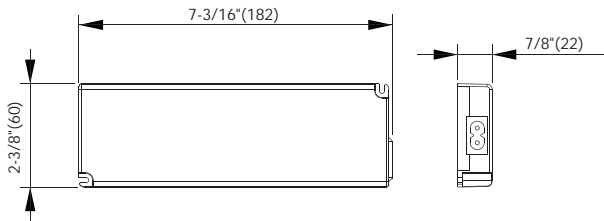
**Features**

- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- No load power consumption <0.5W
- Efficiency≥91% (AC120V, full load)
- Up to 8 drivers maximum interconnected


**Standards**

- UL8750
- UL1310
- FCC15

**Dimensions**



**Power Cable/Splitter Variations**

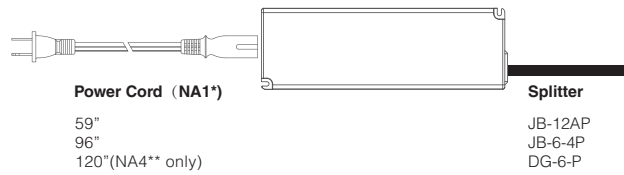

\*NA1 (2-prong standard)  
\*\*NA4 (2-prong flat)

**Characteristics**

Rated input voltage: AC100-120V 50/60Hz(power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	$\lambda$	ta
SLT75-24VL-UN2-A1a	DC24V	0-75W	0.95	-4-95°F (-20-35°C)

**Listed driver configuration**




Example: NA159-7524LDC-12A6

Input Plug	Input Cable Length	Model No.	Splitter	Output Cable Length
NA1-NA1	59-59"	7524LDC-SLT75-24VL-UN2-A1	[blank]-None	6-6"
NA4*-NA4	96-96"		12A6-JB-12A	
	120-120"		6V6-JB-6-4 DG6-DEGSON connector	

\*NA4 is for 120"only

### Splitter Options(MUST CHOOSE)

*\*SPLITTER PACKED AND/OR SHIPPED SEPERATELY\**

Catalog No.	Description	Wire length (inch)
<b>JB-12AP</b> 12-way splitter with 6" cable for Daisy chain driver		6"
<b>JB-6-4P</b> 6-way splitter with 6" cable for Daisy chain driver		6"
<b>DG-6-P</b> Degson connector with 6" cable for Daisy chain driver		6"

### Wiring Diagram

